

CONCRETE CURB & GUTTER

04/15/2021

City of Gallatin

1.0 Introduction

The City of Gallatin is seeking bids for CONCRETE CURB & GUTTER for the Engineering Division. Bids will be due on April 30th, 2021 at 3:00 pm in a sealed envelope clearly marked: **CONCRETE CURB& GUTTER.**

1.1 Scope of Work

The City of Gallatin seeks to receive pricing for various sizes and lengths of concrete curb and gutter.

2.0 Technical Requirements:

- Concrete shall be TDOT Class “A” with minimum compressive strength of 3000 psi @ 28 days.
- **Expansion Joint Requirements:**
 - Concrete expansion material shall be ¾” premolded fiber.
 - At tangent points of circular curbs.
 - Between curbs and abutting rigid objects.
 - Places where stress may develop.
 - To line up with pavement joints where adjacent pavement is concrete.
 - Maximum spacing is to be 100feet.
 - Contraction joints are to be spaced at 10 feet. The spacing of 10 feet may be reduced for closures, but not less than 6 feet.
 - Edges of joints shall be finished on one-quarter inch radii.
 - All cost of joints shall be included in the unit price for concrete curbs.

3.0 Vendor Requirement

- Bidder must supply City with Certificate of Insurance
- Vendor must complete attached Price Sheet
- Pricing good for 1 year .
- **Bidder shall furnish all materials, cones and traffic control.**
- Bidder shall be able to begin work with a 5 day notice from city.
- Contract may be extended for 1 additional year if both parties agree to terms.

4.0 Evaluation of Proposals

The City of Gallatin will award the contract to lowest responsible and responsive bidder meeting specifications, quality, and performance standards pursuant to the Municipal Purchasing Act of 1983. Response will be based on the following factors;

- Completeness of response
- Cost
- Vendor track record, including references
- Quality of service
- Quality of product

5.0 Contract Award

The City of Gallatin reserves the right to reject any or all proposals and to waive any informality found therein. The City of Gallatin will award a contract based on evaluations described above. In the event that the lowest bidder is not available at time of need, the city reserves the right to go with the next lowest bidder.

6.0 Question Submissions

Engineering Department
Attn.: Ihab Habib
641 Long Hollow Pike
Gallatin TN 37066
Telephone: 615- 519-3053

7.0 Proposal Submission

Proposals shall be directed to the attention of:

Finance Department
Attn: J.R. Smith, Jr
132 West Main Street
Gallatin, TN 37066
Telephone: 615-451-5899
Email: jr.smith@gallatintn.gov

PRICE SHEET

Company Name: _____

PRICES ARE TO BE GOOD FOR 1 YEAR

6 -18 COMBINED CURB AND GUTTER


Unit Price for 6" X 12" Curb & Gutter	0 TO 100 LF	\$ _____
Unit Price for 6" X 12" Curb & Gutter	101 TO 500 LF	\$ _____
Unit Price for 6" X 12" Curb & Gutter	501 TO 1000 LF	\$ _____
Unit Price for 6" X 12" Curb & Gutter	1001 TO 2000 LF	\$ _____
Unit Price for 6" X 12" Curb & Gutter	2000 + LF	\$ _____

6-24 CONCRETE COMBINED CURB AND GUTTER

Unit Price for 6" X 18" Curb & Gutter	0 TO 100 LF	\$ _____
Unit Price for 6" X 18" Curb & Gutter	101 TO 500 LF	\$ _____
Unit Price for 6" X 18" Curb & Gutter	501 TO 1000 LF	\$ _____
Unit Price for 6" X 18" Curb & Gutter	1001 TO 2000 LF	\$ _____
Unit Price for 6" X 18" Curb & Gutter	2000 + LF	\$ _____

6-30 CONCRETE COMBINED CURB AND GUTTER

Unit Price for 6" X 24" Curb & Gutter	0 TO 100 LF	\$ _____
Unit Price for 6" X 24" Curb & Gutter	101 TO 500 LF	\$ _____
Unit Price for 6" X 24" Curb & Gutter	501 TO 1000 LF	\$ _____
Unit Price for 6" X 24" Curb & Gutter	1001 TO 2000 LF	\$ _____
Unit Price for 6" X 24" Curb & Gutter	2000 + LF	\$ _____

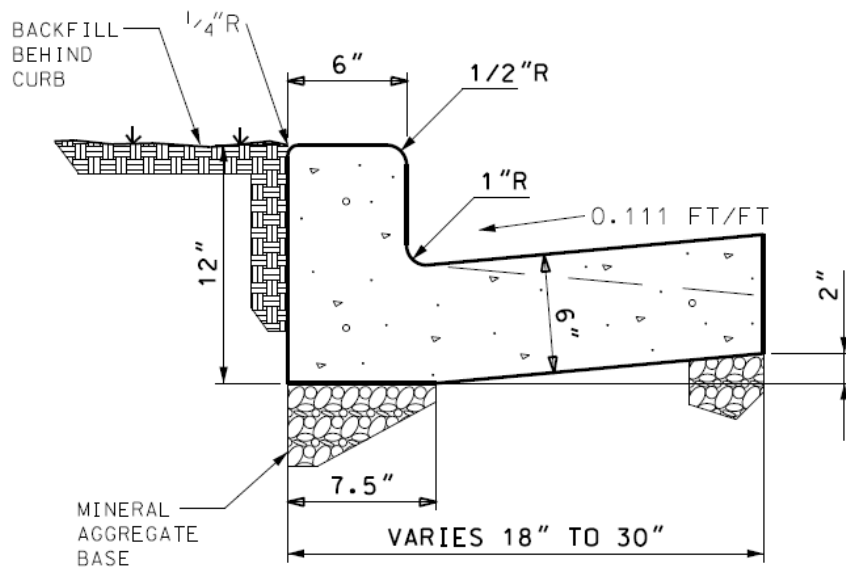

CONCRETE CURB & GUTTER

GENERAL NOTES:

1. CONCRETE SHALL BE TDOT CLASS "A" WITH A MINIMUM COMPRESSIVE STRENGTH OF 3000 PSI @ 28 DAYS.
2. CONCRETE EXPANSION JOINT MATERIAL IS TO BE 3/4" PREMOLDED FIBER.
3. EXPANSION JOINT ARE TO BE PLACED AS FOLLOWS:
 - * AT TANGENT POINTS OF CIRCULAR CURBS.
 - * BETWEEN CURBS AND ABUTTING RIGID OBJECTS.
 - * AT PLACES WHERE FUTURE STREETS MAY DEVELOP.
 - * SO AS TO LINE UP WITH PAVEMENT JOINTS WHERE THE ADJACENT PAVEMENT IS CONCRETE.
 - * MAXIMUM SPACING SHALL BE 100 FT.
4. CONTRACTION JOINTS ARE TO BE SPACED EVERY 10 FEET. THE SPACING OF 10 FEET MAY BE REDUCED FOR CLOSURES, BUT NOT LESS THAN 6 FEET.
5. ALL COSTS OF JOINTS SHALL BE INCLUDED IN THE UNIT PRICE BID FOR CONCRETE CURB AND GUTTER.



ENGINEERING DIVISION
(615) 451-5965

CONCRETE CURB AND GUTTER

SCALE: NTS

DWG. # COG-PV-002